

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ09-01E		
	Product Specification and Approval Sheet	Version	7	Page

Radial Leaded PTC Resettable Fuse : FRH Series

1. Summary

- (a) **Applications** : Wide variety of electronic equipment
- (b) **Product Features** : Low hold current Solid state, Radial leaded product ideal for up to 60V/250V/600V
- (c) **Operation Current** : 80mA~180mA
- (d) **Maximum Voltage** : 60V/250V/600V
- (e) **Temperature Range** : -40°C to 85°C

2. Agency Recognition

UL : File No. E211981
C-UL: File No. E211981
TÜV: File No. R50021651

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Maximum Current	Max Oper. Voltage	Max Int. Voltage	Resistance Tolerance	
					R _{MIN}	R _{1MAX}
	I _H , A	I _{MAX} , A	V _{MAX} , Vdc	V _{I-MAX} , V	Ω	Ω
FRH080-250U	0.08	3.0	60	250	14.0	33.0
FRH080-250	0.08	3.0	60	250	14.0	33.0
FRH110-250U	0.11	3.0	60	250	5.0	16.0
FRH110-250	0.11	3.0	60	250	5.0	16.0
FRH120-250U	0.12	3.0	60	250	6.0	16.0
FRH120-250	0.12	3.0	60	250	4.0	16.0
FRH145-250U	0.15	3.0	60	250	3.5	12.0
FRH145-250	0.15	3.0	60	250	3.0	12.0
FRH180-250U	0.18	10.0	60	250	0.8	4.0
FRH180-250	0.18	10.0	60	250	0.8	4.0
FRH150-600	0.15	3.0	60	600	6.0	22.0
FRH160-600	0.16	3.0	60	600	4.0	18.0

I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
 I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
 V_{MAX}=Maximum operating voltage at which the device can withstand without damage at its rated current.
 V_{I-MAX} = Maximum interrupt voltage device can withstand for short period of time. (Not for long term.)
 I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
 Pd=Typical power dissipated from device when in the tripped state in 23°C still air environment.
 R_{MIN}=Minimum device resistance at 23°C.
 R_{1MAX}=Maximum device resistance at 23°C 1 hour after tripping .
 Physical specifications:
 Lead material: FRH080-250 ~ FRH180-250 Tin plated copper,22 AWG.
 FRH150-600 ~ FRH160-600 Tin plated copper,22 AWG.
 Soldering characteristics:MIL-STD-202, Method 208E.
 Insulating coating:Flame retardant epoxy ,meet UL-94V-0 requirement.




NOTE : All FRH products are designed to assist equipment to pass ITU, UL1950 or GR1089 specification.

CAUTION : FRH devices are not intended for continuous use of Line Voltage such as 120 VAC ~ 600VAC and above.

NOTE : Specification subject to change without notice.



4. Production Dimensions (millimeter)




Lead Size :22AWG,
Φ 0.65 mm Diameter

Lead Size : 22AWG,
Φ 0.65 mm Diameter

Part Number	Fig	A	B	C	D	E
		Maximum	Maximum	Typical	Minimum	Maximum
FRH080-250U	1	5.1	9.1	5.0	4.7	3.8
FRH080-250	1	5.8	9.6	5.0	4.7	4.6
FRH110-250U	1	5.9	9.4	5.0	4.7	3.8
FRH110-250	1	6.8	9.9	5.0	4.7	4.6
FRH120-250U	2	6.0	10.0	5.0	4.7	3.8
FRH120-250	2	6.5	11.0	5.0	4.7	4.6
FRH145-250U	2	6.0	10.0	5.0	4.7	3.8
FRH145-250	2	6.5	11.0	5.0	4.7	4.6
FRH180-250U	2	10.4	12.6	5.0	4.7	3.8
FRH180-250	2	10.9	12.6	5.0	4.7	4.6
FRH150-600	2	13.5	12.6	5.0	4.7	6.0
FRH160-600	2	16.0	12.6	5.0	4.7	6.0

5. Thermal Derating Curve

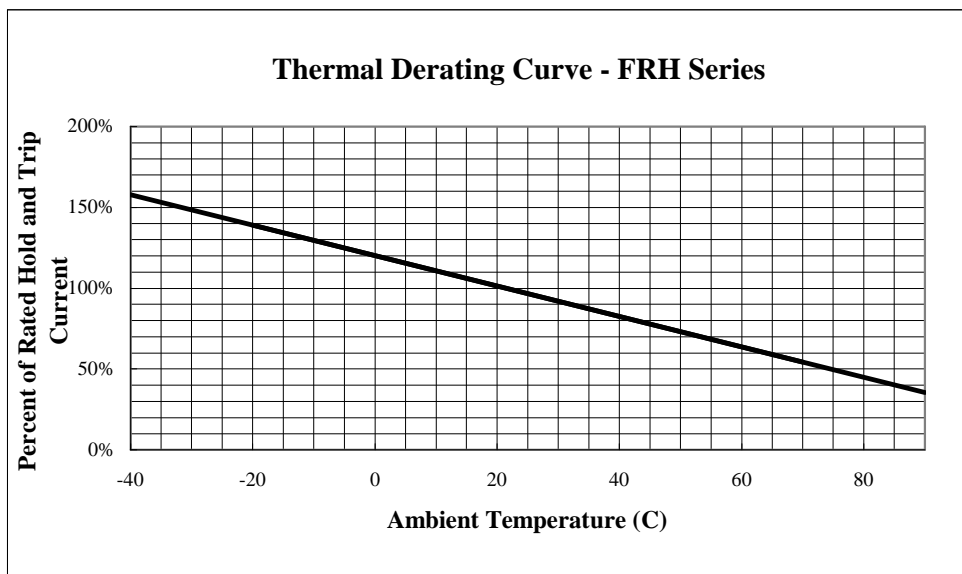


NOTE : Specification subject to change without notice.



6. Typical Time-To-Trip at 23°C

- A=FRH080-250(U)
- B=FRH110-250(U)
- C=FRH120-250(U)
- D=FRH145-250(U)
- E=FRH180-250(U)
- F=FRH150-600
- G=FRH160-600

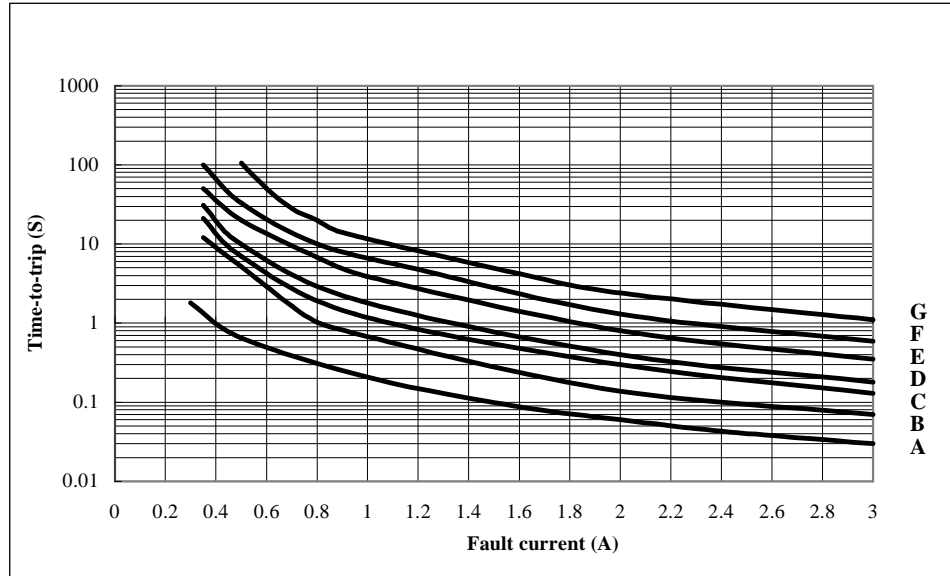

7. Material Specification

Lead material : Tin plated copper, 22 AWG.


Soldering characteristics:MIL-STD-202, Method 208E.

Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement

8. Part Numbering and Marking System


Part Numbering System

FRH □ □ □ - □ □ □ U

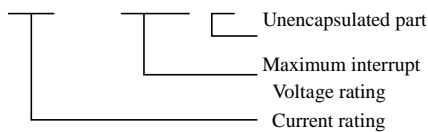

Example

Part Marking System

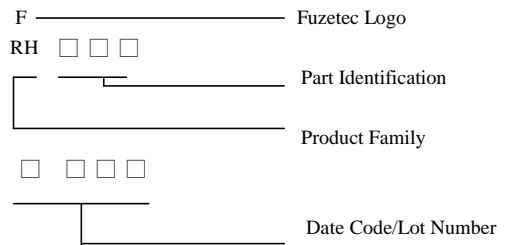

- * FRH150-600 Marking : RH6150
- * FRH160-600 Marking : RH6160

Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

NOTE : Specification subject to change without notice.