



Construction and Dimensions

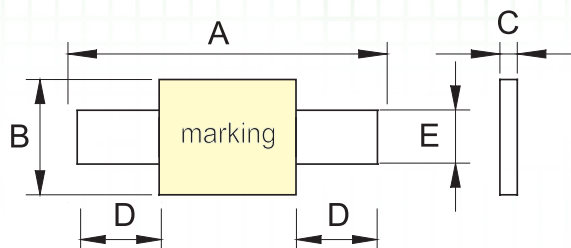

Style1

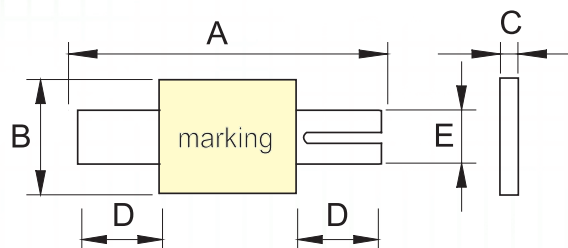

Style2

Unit:mm

| Model | A | | B | | C | | D | | E | | Style |
|---------|------|------|------|------|------|------|------|------|------|------|-------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | |
| SLR190 | 20.0 | 22.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.7 | 6.7 | 3.8 | 4.2 | 1 |
| SLR190S | 20.0 | 22.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.7 | 6.7 | 3.8 | 4.2 | 2 |
| SLR260 | 20.5 | 23.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.0 | 6.0 | 3.8 | 4.2 | 1 |
| SLR260S | 20.5 | 23.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.0 | 6.0 | 3.8 | 4.2 | 2 |
| SLR380 | 23.5 | 26.0 | 9.8 | 10.5 | 0.5 | 1.1 | 5.0 | 7.0 | 5.7 | 6.3 | 1 |
| SLR450 | 23.5 | 26.0 | 9.8 | 10.5 | 0.5 | 1.1 | 5.0 | 7.0 | 5.7 | 6.3 | 1 |
| SLR550 | 34.5 | 37.0 | 6.7 | 7.3 | 0.5 | 1.1 | 5.0 | 7.0 | 4.7 | 5.3 | 1 |
| SLR600 | 23.5 | 26.0 | 12.7 | 13.3 | 0.5 | 1.1 | 4.0 | 6.0 | 5.7 | 6.3 | 1 |
| SLR730 | 27.0 | 29.1 | 14.0 | 14.5 | 0.5 | 1.1 | 4.0 | 6.0 | 5.7 | 6.3 | 1 |


* Slit size : 0.5mm x 4.0mm (Nominal)

Electrical Characteristics at 23°C :

| Model | V _{max} (Volts) | I _{max} (Amps) | I _{hold} (Amps) | I _{trip} (Amps) | R _{min} (Ω) | R _{max} (Ω) | R _{1 max} (Ω) | P _(d) (Watts) |
|---------|-----------------------------|----------------------------|-----------------------------|-----------------------------|---------------------------|---------------------------|-----------------------------|-----------------------------|
| SLR190 | 16 | 100 | 1.9 | 3.9 | 0.039 | 0.072 | 0.102 | 1.2 |
| SLR190S | 16 | 100 | 1.9 | 3.9 | 0.039 | 0.072 | 0.102 | 1.2 |
| SLR260 | 16 | 100 | 2.6 | 5.8 | 0.020 | 0.042 | 0.063 | 2.5 |
| SLR260S | 16 | 100 | 2.6 | 5.8 | 0.020 | 0.042 | 0.063 | 2.5 |
| SLR380 | 16 | 100 | 3.8 | 8.9 | 0.013 | 0.026 | 0.037 | 2.5 |
| SLR450 | 20 | 100 | 4.5 | 8.9 | 0.011 | 0.020 | 0.028 | 2.5 |
| SLR550 | 20 | 100 | 5.5 | 10.5 | 0.009 | 0.016 | 0.022 | 2.8 |
| SLR600 | 20 | 100 | 6.0 | 11.7 | 0.007 | 0.014 | 0.019 | 2.8 |
| SLR730 | 20 | 100 | 7.3 | 14.1 | 0.006 | 0.012 | 0.015 | 3.3 |

* Definition of electrical characteristics refer to page 6.

Construction and Dimensions

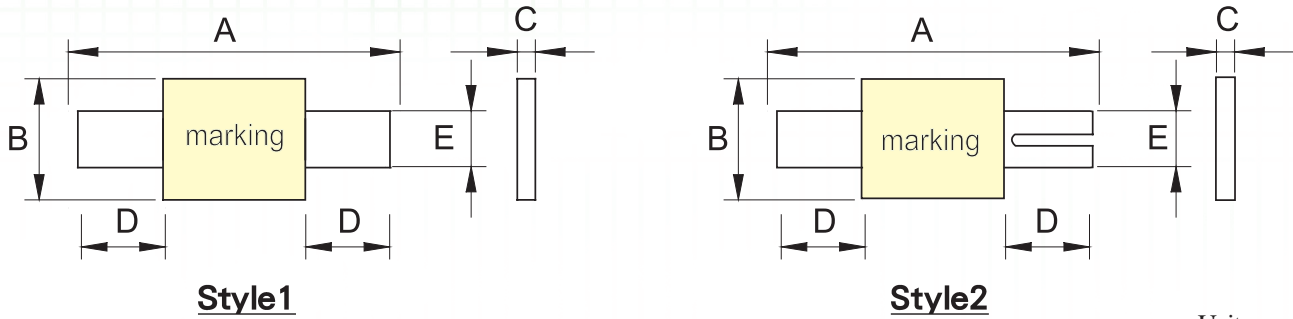

Unit:mm

| Model | A | | B | | C | | D | | E | | Style |
|---------|------|------|------|------|------|------|------|------|------|------|-------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | |
| SVT170 | 14.0 | 17.5 | 6.5 | 7.4 | 0.5 | 1.1 | 3.7 | 5.7 | 3.8 | 4.2 | 1 |
| SVT175 | 20.5 | 23.1 | 3.3 | 3.9 | 0.5 | 1.1 | 4.0 | 6.0 | 2.3 | 2.7 | 1 |
| SVT200 | 20.5 | 23.1 | 3.3 | 3.9 | 0.5 | 1.1 | 4.0 | 6.0 | 2.3 | 2.7 | 1 |
| SVT210 | 20.5 | 23.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.0 | 6.0 | 3.8 | 4.2 | 1 |
| SVT210S | 20.5 | 23.1 | 4.8 | 5.3 | 0.5 | 1.1 | 4.0 | 6.0 | 3.8 | 4.2 | 2 |
| SVT240 | 23.5 | 26.2 | 4.8 | 5.3 | 0.5 | 1.1 | 4.0 | 6.5 | 3.8 | 4.2 | 1 |

* Slit size : 0.5mm x 4.0mm (Nominal)

Electrical Characteristics at 23°C :

| Model | V _{max} (Volts) | I _{max} (Amps) | I _{hold} (Amps) | I _{trip} (Amps) | R _{min} (Ω) | R _{max} (Ω) | R _{I max} (Ω) | P _(d) (Watts) |
|---------|-----------------------------|----------------------------|-----------------------------|-----------------------------|---------------------------|---------------------------|-----------------------------|-----------------------------|
| SVT170 | 16 | 100 | 1.70 | 3.40 | 0.030 | 0.052 | 0.12 | 1.2 |
| SVT175 | 16 | 100 | 1.75 | 3.60 | 0.030 | 0.052 | 0.12 | 1.2 |
| SVT200 | 16 | 100 | 2.00 | 4.80 | 0.023 | 0.039 | 0.09 | 1.2 |
| SVT210 | 16 | 100 | 2.10 | 4.80 | 0.018 | 0.035 | 0.08 | 1.2 |
| SVT210S | 16 | 100 | 2.10 | 4.80 | 0.018 | 0.035 | 0.08 | 1.2 |
| SVT240 | 16 | 100 | 2.40 | 5.90 | 0.013 | 0.030 | 0.07 | 1.2 |

* Definition of electrical characteristics refer to page 6.